

Safety Instructions

The safety instructions in this manual have been classified according to the seriousness of the risk, as follows:

DANGER: "Danger" indicates the existence of a hazard that could result in death or catastrophic bodily injury, if the safety instruction is not observed.

WARNING: "Warning" indicates the existence of a hazard that could result in serious bodily injury, if the safety instruction is not observed.

CAUTION: "Caution" indicates the existence of a hazard that could result in minor bodily injury or property damage, if the safety instruction is not observed.

NOTICE: "Notice" contains general information that relates to the safe operation of the flashlight, and its battery and charging equipment.



DANGER! MAY CAUSE DAMAGE TO EYESIGHT. Directly looking at or shining the light into another person's eyes, may cause temporary blindness or irreversible eye damage.



DANGER! LITHIUM-ION BATTERIES ARE COMBUSTIBLE. Improper use or lack of maintenance could cause permanent damage to the flashlight, property or inflict bodily injury.*



CAUTION! FLASHLIGHT MAY GET HOT. Never touch the Telescopic Focal Lens(A) of the flashlight or put it back in the storage case during or after immediate use.



NOTICE! TactX is not liable for damage or injuries resulting from misuse, improper maintenance, or batteries and chargers incompatible with the LM500 and its accessories.

DANGER:

- To avoid risk of damage to eyesight, never look directly into the beam when the light is on, nor shine it directly into another person's eyes.
- Any battery may rupture or explode if put in a fire or otherwise exposed to excessive heat. To avoid risk of injury, DO NOT expose batteries to fire or excessive heat.
- Never short-circuit a battery pack by bringing the terminals in contact with a metal object. Explosion, burns, other bodily injury or fire could result.
- Never try to disassemble or repair the flashlight or charging accessories. Electric shock or fire may result. Contact TactX Flashlights for repairs.
- Never alter the plug on your charging accessories. If the plug will not fit into the available outlet, have a proper outlet installed by a qualified electrician. Trying to plug into an improper outlet can result in electric shock or fire.

WARNING:

- Any battery may leak harmful chemicals which may damage skin, clothing, or the inside of the flashlight. To avoid risk of injury, do not let any material leaked from a battery come in contact with eyes or skin.
- Never heat and never attempt to disassemble the battery pack, as that could cause leakage of caustic electrolyte. In the event of skin contact, wash the affected area immediately and obtain prompt medical attention.
- Never allow liquids to spill on the Direct Plug-in Charger and DO NOT charge outdoors, as the unit is not waterproof. Exposure to rain or other liquid could result in fire or electric shock.

CAUTION:

- Never store or transport flammable liquids, gases or explosive materials in the same compartment as the flashlight or its accessories, as possible sparking in the equipment could ignite a fire or explosion.
- Always secure the flashlight in its storage case. Never place the flashlight on the passenger seat or anyplace else in the car where it can become a projectile during a collision or sudden stop.
- Never expose the terminals of the Lithium-Ion Battery to any metal object. When transporting a Lithium-Ion Battery outside the flashlight, wrap it or place it in a plastic bag, or put insulating tape over the terminals.
- DO NOT charge or operate the flashlight near flammable materials.
- DO NOT charge battery in gas-tight enclosures as hydrogen gas is emitted under certain conditions and can explode if concentrated and confined.
- DO NOT operate flashlight with the lens off and the LED on and exposed. Personal injury or damage to heat sensitive materials may result (e.g. plastics, rubber, cloth fabrics, etc.)

NOTICE:

To reduce the risk of harm to your flashlight and others:

- **NEVER allow children to play with, or operate the LED flashlight!**
- Locate power cord away from foot traffic, heavy objects and other causes of abrasion or stress, as it presents a fire and/or electric shock hazard.
- Never pull on the power cord when unplugging the Direct Plug-in Charger. Grasp the Direct Plug-in Charger(D) main unit and pull to avoid damage.
- Between uses, disconnect Direct Plug-in Charger(D) from power source.
- DO NOT use non-rechargeable batteries in your rechargeable flashlight.
- For prolonged storage, remove battery and store apart from flashlight.

*Carefully follow the "18650 Lithium-Ion Battery Maintenance Guide." for proper battery maintenance, care and disposal.



Specifications

Item# TX050054

Flashlight Body: Heavy-Duty Aluminum Alloy

Light Source: XM-L T6 LED Bulb

Output: 500 Lumens

Light Distance: 200 meters / 656 feet

Water Resistance: IPX4 - Resistant to Heavy Water Splashes

Battery Type: 18650 2200mAh 3.7v Rechargeable (Sold Separately or in Power Kits)

Battery Life Per Charge: 3 Hours (Approx.)

Switch Type(s):

- Tail Push-Button Switch
- Telescopic Piston-Action Focal Lens

Functions:

- 100% Full-Strength Light
- 50% Medium Light
- 25% Low Light
- Rapid Emergency Flash
- SOS Signal Flash
- Telescopic Beam Adjust

Size: 40mm(D) x 145mm(L) / 1.57in(D) x 5.7in(L)

Weight (Flashlight Only): 162g (1/3 lb)

LM500 Base Model Includes:

- 1x LM500 Flashlight
- 1x Adjustable Wrist Strap
- 1x Custom Clamshell Storage Case
- 1-Year Mfg. Warranty**
- 1x Instruction Booklet

RoHS 

Made in China

Getting to Know your TactX-LM500 LED Flashlight

It is important to familiarize yourself with the LM500 LED Flashlight before operation for safe, optimal performance.



Direct Plug-in Charging

If you decide to use the Direct Plug-in Charger(D) capability, you will **never** need to remove the battery from the flashlight to recharge. Follow these simple steps to use this feature:

1. Always make sure your battery has been properly installed, and be sure the flashlight is turned **off** before charging. (Reference Section: "Installing/Replacing the Battery.")
2. Pull the **Telescopic Focal Lens(A)** out until you reveal the small **Rubber Tab(B)**. Then, pull the Rubber Tab out to expose the **Charging Socket(C)**.
3. Plug the **Direct Plug-in Charger(D)** into an AC 100-240v wall outlet. You will see a green LED light emit on the Charger. Then, plug the small connector end of the Direct Plug-in Charger into the Flashlight's **Charging Socket(C)**.
4. Push once on the **Tail Push Button(E)** to activate the charging LED indicator on the **Direct Plug-in Charger(D)**. Solid Red = Charging / Solid Green = Fully Charged.
5. When the LED light turns green on the **Direct Plug-in Charger(D)**, charging is complete. Charge time on a 90-100%-depleted battery is approximately 8-10 hrs.
6. When charging is complete, click the tail push button once to turn off and then unplug the **Direct Plug-in Charger(D)** from the wall outlet. Reverse directions in step 2.

For more details on how to use the Direct Plug-in Charger, reference the "Direct Plug-in Charger Instructions" that came with your charger.

Installing/Replacing the Battery

The LM500 accepts any 18650 Lithium-Ion 3.7V Rechargeable Battery. **The use of incompatible batteries or chargers will void the warranty at the discretion of TactX.** Be sure the flashlight is turned off before installing or replacing the battery.

1. Unscrew the **Tail End Cap(F)**.
2. Always inspect the battery for signs of swelling, stress, discoloring, or leaking, as these symptoms indicate that the battery will need to be properly handled and disposed. (**Reference the "18650 Lithium-Ion Battery Maintenance Guide."**)
3. Insert the Battery Positive(+) end first into the flashlight.



4. Carefully screw the **Tail End Cap(F)** ensuring a tight fit. Align properly to prevent stripping the screw threads. The tail end cap must be securely hand fastened to function properly.



TactX Flashlights accepts no liability for damage and injuries arising from misuse, improper maintenance, or outside accessories that are incompatible with the LM500 LED Flashlight and its accessories—TactX reserves the right to void the Manufacturer's Warranty at anytime.




Required Accessories

One(1) charger and one(1) battery are required to operate your TactX-LM500 Flashlight. We only recommend purchasing them from www.tactxflashlights.com for optimal and safe operation of the LM500 product:

Direct Plug-in Charger(D) Item# TX0500DPC	18650 Single Battery Wall Charger Item# TX18650SBWC
18650 2200mAh / 3.7V Lithium-Ion Rechargeable Battery Item# TX18650A	

Telescopic Lens Adjustment

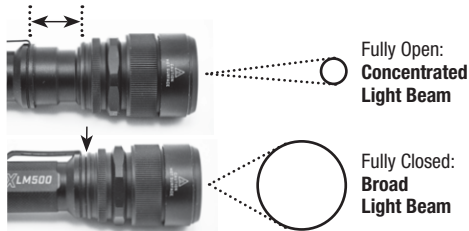

**1-Year Mfg. Warranty covers manufacturer's defects ONLY, and DOES NOT INCLUDE cosmetic blemishes, scratches and normal wear. Reference the warranty insert, "1-Year Manufacturer's Warranty" or go to www.tactxflashlights.com/LM500warranty for details.